

1.0mmW-1.85mmV ADAPTERS NEW






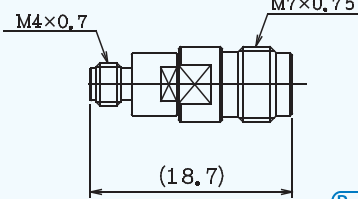


► Overview

Adapter for 1.00mmW connector and 1.85mmV connector. As a new product, we have developed this adapter with our knowledge and experience of millimeter wave. The product has excellent V.S.W.R. and insertion loss.

► Applications

High frequency measurement, Connections of high speed data-communication devices, optical component, millimeter wave device and modules.

► Product (1.0mmW-1.85mmV ADAPTERS)

Product : 02R0233-00		ADP	1.0mmW/P-1.85mmV/J		
		(RoHS)	V.S.W.R.	DC ~ 26.5GHz ≤ 1.2 26.5 ~ 50GHz ≤ 1.3 50 ~ 65GHz ≤ 1.4	
			Insertion loss	DC ~ 65GHz 1.0dB 以下	
			Connector	Material	Finish
			1.0mmW/P	SUS	Pv
			1.85mmV/J	SUS	Au
Product : 02R0234-00		ADP	1.0mmW/P-1.85mmV/P		
		(RoHS)	V.S.W.R.	DC ~ 26.5GHz ≤ 1.2 26.5 ~ 50GHz ≤ 1.3 50 ~ 65GHz ≤ 1.4	
			Insertion loss	DC ~ 65GHz 1.0dB 以下	
			Connector	Material	Finish
			1.0mmW/P	SUS	Pv
			1.85mmV/P	SUS	Pv
Product : 02R0235-00		ADP	1.0mmW/J-1.85mmV/J		
		(RoHS)	V.S.W.R.	DC ~ 26.5GHz ≤ 1.2 26.5 ~ 50GHz ≤ 1.3 50 ~ 65GHz ≤ 1.4	
			Insertion loss	DC ~ 65GHz 1.0dB 以下	
			Connector	Material	Finish
			1.0mmW/J	SUS	Au
			1.85mmV/J	SUS	Au
Product : 02R0236-00		ADP	1.0mmW/J-1.85mmV/P		
		(RoHS)	V.S.W.R.	DC ~ 26.5GHz ≤ 1.2 26.5 ~ 50GHz ≤ 1.3 50 ~ 65GHz ≤ 1.4	
			Insertion loss	DC ~ 65GHz 1.0dB 以下	
			Connector	Material	Finish
			1.0mm/J	SUS	Au
			1.85mmV/P	SUS	Pv

※ V.S.W.R. and insertion loss is measured two adapters connected, so the value is double.